


Dimensions

measures in millimeters

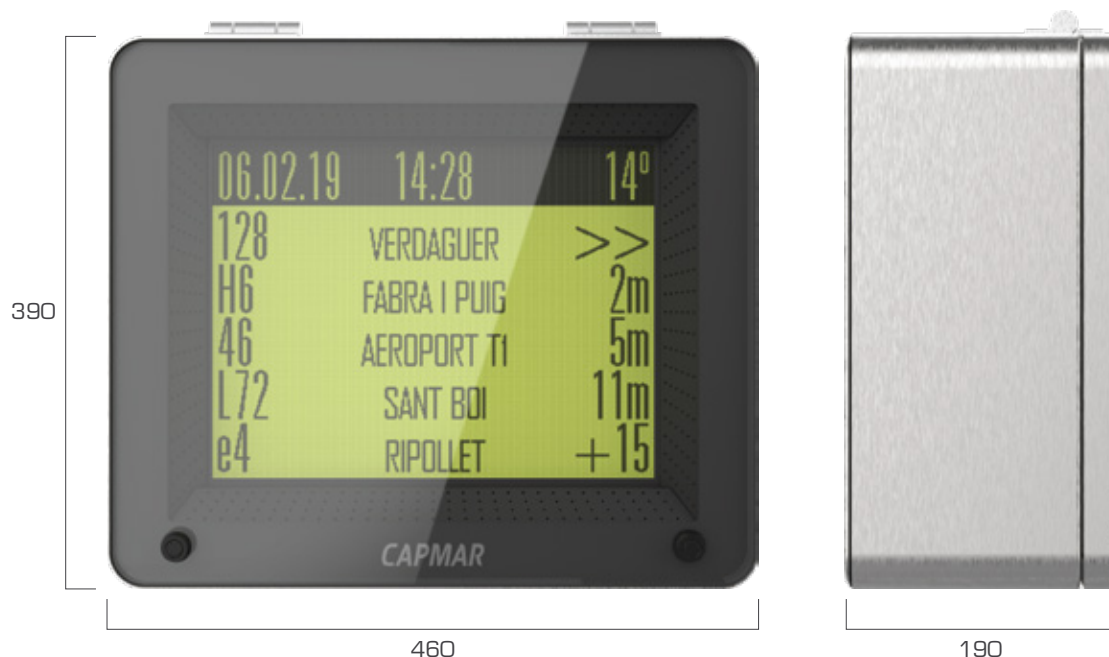

S240

integration with



The **adapt** family is a versatile solution for the modernization of current infrastructure or urban furniture. The **adapt·S** dynamic information modules are the smallest in the market. They allow you to install dynamic information displays with cutting edge technology almost anywhere, with a simple installation and reduced costs.

Features

- 16" electronic ink display.
- Up to 6 lines of text simultaneously. Up to 24 characters per line.
- Notices and messages function with simple graphics.
- LED display illumination.
- Audio messages system.
- Compatible power sources:
 - Solar energy.
 - Power grid connection.
 - Hybrid (grid connection + batteries).
- Anti-reflective frontal safety glass.
- Adaptable anchoring system for shelters and poles.*

Specifications

Power source:	Photovoltaic panel**
Installation voltage:	12V
Average power draw:	2.88W
Battery autonomy:	up to 10 days***
Data transmission:	NB-IoT, GPRS, Cat-M1 optional: 4G, 5G
Display technology:	ChLCD
Display resolution:	320x240px
Operation temperature:	-20 to +80°C
Materials and finishes:	Brushed AISI-304 Stainless steel
Dust and water protection:	IP-65
Impact resistance:	IK-10

* May require additional costs.

** Sold separately.

*** Autonomy may vary depending on the configuration.

Dimensions

measures in millimeters



SHD

integration with



The **adapt** family is a versatile solution for the modernization of current infrastructure or urban furniture. The **adapt·S** dynamic information modules are the smallest in the market. They allow you to install dynamic information displays with cutting edge technology almost anywhere, with a simple installation and reduced costs.

Features

- 15" True Color TFT display.
- Can display video and animations.
- Wireless communication via 4G, 5G or WiFi.
- High display brightness. Outdoors ready.
- Audio messages system.
- Compatible power sources:
 - Power grid connection.
 - Hybrid (grid connection + batteries).
- Anti-reflective frontal safety glass.
- Adaptable anchoring system for shelters and poles*

Specifications

Power source:	Power grid connection
Installation voltage:	220V
Data transmission:	4G, 5G, WiFi, Ethernet
Display technology:	TFT LCD
Display resolution:	XGA, 1024x768px
Display brightness:	1500 cd/m²
Color depth:	24-bit, 16.7m
Visibility angles:	Horizontal: 140° Vertical: 125°
Operation temperature:	-30 to +80°C
Materials and finishes:	AISI-304 brushed stainless steel
Dust and water protection:	IP-65
Impact resistance:	IK-10

* May require additional costs.