menir



CAPMAR

www.capmarsystems.com


Tel: +34 935 808 711 info@capmarsystems.com

capmar cloud

menir

Dimensions measures in millimeters

Datasheet

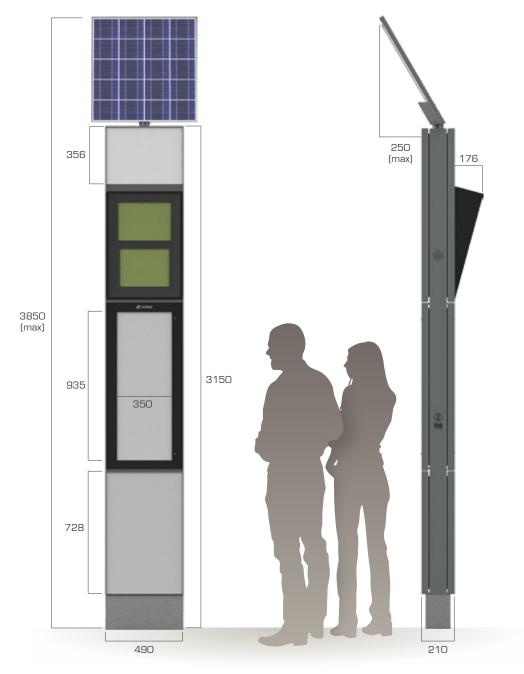

Specifications

Power source:	Photovoltaic panel	Build n	
Installation voltage:	12V	Finishe	
Average power draw:	2.88W	Display	
Battery autonomy:	up to 10 days*		
Data transmission:	NB-loT, GPRS, Cat-M1, optional: 4G, 5G	Dust a protec	
Display technology:	High Contrast ChLCD	Impact	
Operation temperature:	-20 to +80°C		
Illumination type:	High efficiency SMD LED		

Build materials:	Steel, aluminum
Finishes:	Oven cured powder coating
Display protection:	Anti-reflective safety glass
Dust and water protection:	IP-65
Impact resistance:	IK-10

* Autonomy may vary depending on the configuration.

with

integration



www.capmarsystems.com

capmar

cloud